
STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CSSTP-M002-00 (788)	24	37

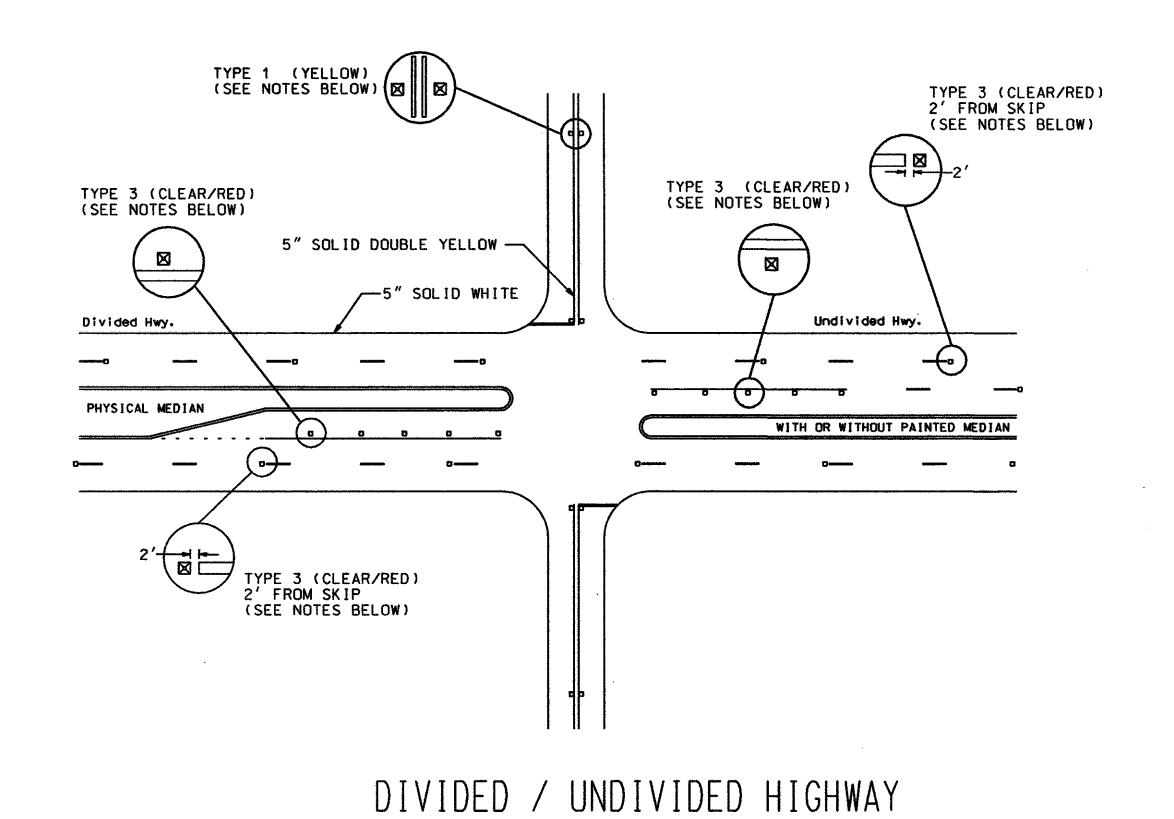


TYPE 1 (YELLOW)
2' FROM SKIP
(SEE NOTES BELOW)

TRAFFIC


TRAFFIC

5" SKIP DOUBLE YELLOW

REVERSIBLE LANE

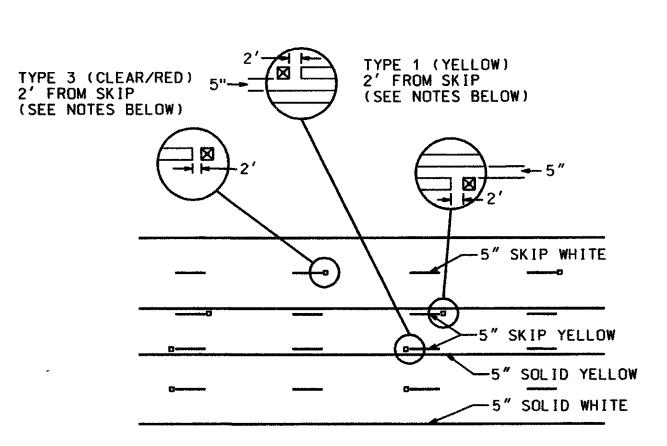

TWO WAY LEFT TURN LANE

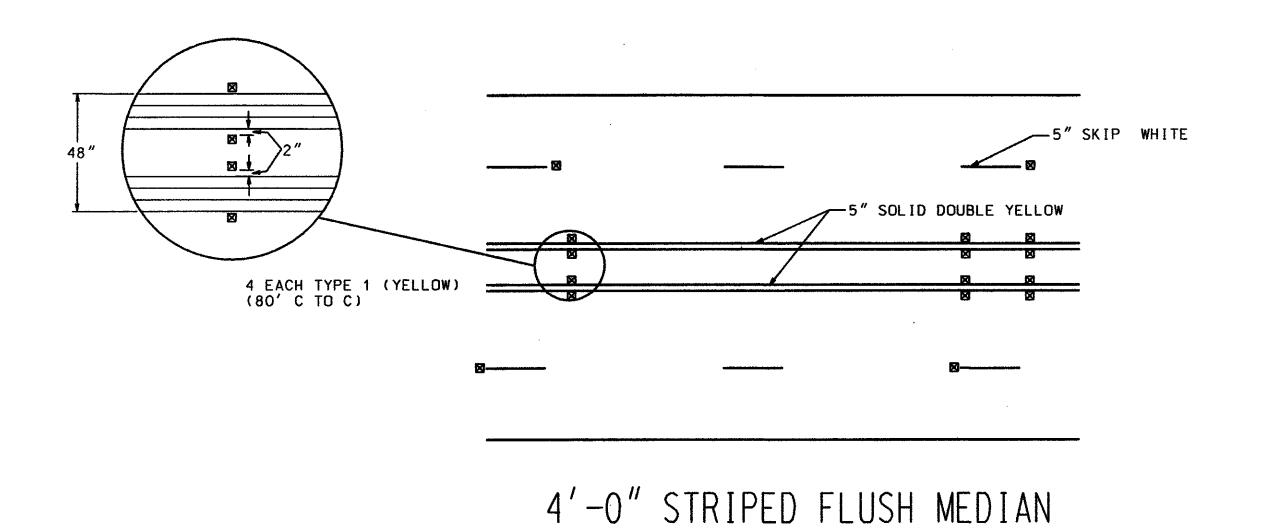

PCBOTB

TYPE 1 (YELLOW)
SEE NOTES BELOW

TYPE 2 (YELLOW)
2' FROM SKIP
(SEE NOTES BELOW)

5" SOLID YELLOW

5" SKIP YELLOW

NO PASSING ZONE

GENERAL NOTES:

- 1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
- 2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
- 3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
- 4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
- 5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED 40 FT.

DATE	REVISIONS	GEORGIA DEPARTMENT OF TRANSPORTATION
9-4-03	NO PASSING ZONE RPM's	OFFICE OF TRAFFIC SAFETY & DESIGN
1-13-04	NO PASSING ZONE RPM's	OFFICE OF TRAFFIC SAFETT & DESTOR
		DETAILS OF
		RAISED PAVEMENT MARKER LOCATION
		NON-LIMITED ACCESS ROADWAY
		NO SCALE JANUARY 2000